


OPK SERIES PUSH-IN TYPE TERMINAL BLOCKS OPK SERİSİ YAY BASKILI RAY KLEMENSLER

PUSH IN



OPK 6

Order No: 1522

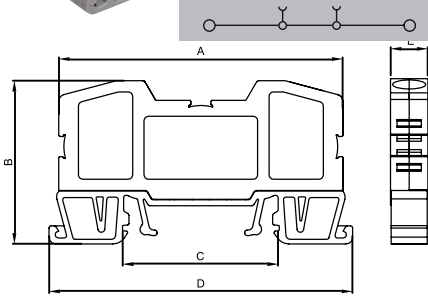

Dimensions Ölçüler (mm)	A	B	C	D	E
	62,5	36,0	34,5	66,4	8,2

MATERIAL / MATERYAL

Body / Gövde	PA6.6 V2
Bridge / Köprü	Copper / Bakır
Orange Button Turuncu Buton	PA6.6 V2
Spring/Yay	Stainless Steel / Paslanmaz Çelik
Temp./Sıcaklık	-40 °C, +140 °C
Cable Strip L. / Soyma Boyu	12 mm

DATA / VERİ	TSE / CE
Voltage / Gerilim	750 V
Current / Akım	41 A
Section / Kesit	6,0 mm ²
Norm	EN-60947-7-1

RENKLER / COLOURS

RENK/COLOUR	Order No./Sip.No.	Pcs./Ad.
GREY / GRİ	1522	100
CREAM / KREM	1523	100
BLACK / SİYAH	1524	100
BLUE / MAVİ	1525	100
BROWN/K.RENGİ	1526	100
RED / KIRMIZI	1527	100
YELLOW / SARI	1528	100
GREEN / YEŞİL	1529	100

ACCESSORIES / AKSESUARLAR

Cross Connection / Köprü	Order No./ Sip. No.	Section/ Kesit	Pcs./ Ad.
	1945	6 / 2	100
	1946	6 / 3	50
	1947	6 / 4	50
	1948	6 / 10	15
	1949	6 / 20	10
Stopper / Durdurucu	1202,1222,1212		
Group Sticker/Grup Etiketi	1232		
Marking / Markalama	9770 / 4440 / 4442 / 9540 / 7301		